


SLIDING GLASS DOORS 800 SERIES

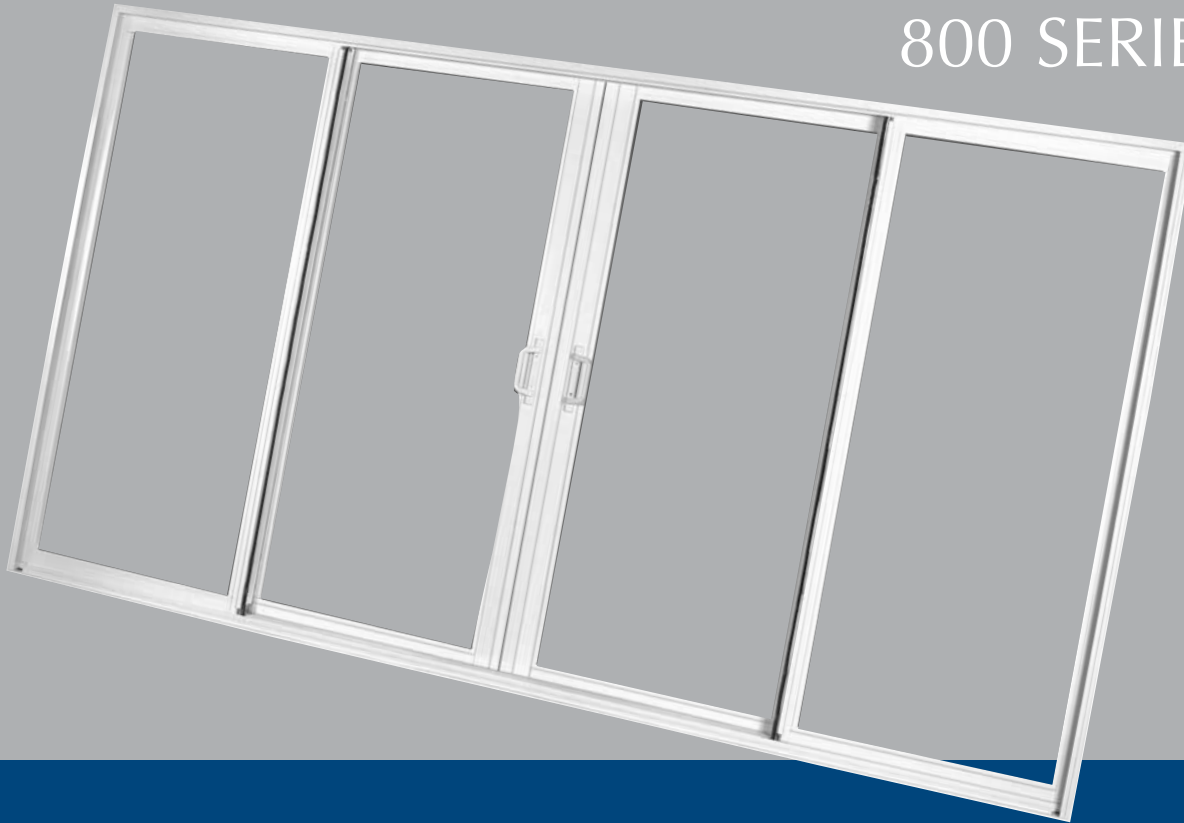

FEATURES & BENEFITS

- Multi-panel sliding glass doors up to 9' tall
- Stainless steel mortise lock for adjustability, strength and security
- Adjustable stainless steel tandem roller system for smooth operation
- Fully weatherstripped deep integral panel interlocks and door frame provides tight seal against wind and water
- Deluxe, heavy-duty extruded screen panel with flush latch lock and stainless steel roller assembly
- 4⁵/₁₆" frame depth, or 5³/₈" frame depth with optional screen track
- Interlock system provides exceptional strength and wind load protection
- Custom key lock available

PRODUCT SPECIFICATIONS - SGD830

TEST TYPE	FRAME TYPE & MAXIMUM SIZE	FRAME DEPTH	POSITIVE DESIGN PRESSURE	NEGATIVE DESIGN PRESSURE	WATER RESISTANCE	AIR INFILTRATION	GLAZING	TESTS COMPLETED
LARGE MISSILE	OX or XO: 96" x 108" OXO: 145 ¹ / ₈ " x 108" OXXO: 191 ³ / ₄ " x 108"	4 ⁵ / ₁₆ "	+90	-110	13.5 psf	0.20 @ 6.24	<ul style="list-style-type: none"> • 7¹/₁₆" PVB Laminated (Heat Strengthened/Heat Strengthened) • 7¹/₁₆" SGP Laminated (Heat Strengthened/Heat Strengthened) • 7¹/₁₆" PVB Laminated (Heat Strengthened/Heat Strengthened) 	<ul style="list-style-type: none"> • Miami-Dade NOA: 07-1212.03 • Florida Product Approval: FL-251
SMALL MISSILE	OX or XO: 96" x 108" OXO: 145 ¹ / ₈ " x 108" OXXO: 191 ³ / ₄ " x 108"	4 ⁵ / ₁₆ "	+90	-140	13.5 psf	0.20 @ 6.24	<ul style="list-style-type: none"> • 7¹/₁₆" PVB Laminated (Tempered/Tempered) 	<ul style="list-style-type: none"> • Miami-Dade NOA: 07-0511.04 • Florida Product Approval: FL-251
NON-IMPACT	OX or XO: 96" x 108" OXO: 145 ¹ / ₈ " x 108" OXXO: 191 ³ / ₄ " x 108"	4 ⁵ / ₁₆ "	+90	-140	13.5 psf	0.19 @ 6.24	<ul style="list-style-type: none"> • 3¹/₁₆" Monolithic (Tempered) • 1¹/₄" Monolithic (Tempered) • 3¹/₈" Monolithic (Tempered) 	<ul style="list-style-type: none"> • Miami-Dade NOA: 07-1212.04 • Florida Product Approval: FL-251